TABLE I - STANDARD UNIT AIRFLOW RATING

NO. OF FILTERS WIDE		1/2	1	1-1/2	2	2-1/2	3	3-1/2	4	4-1/2	5	5-1/2	6
WIDTH INCHES		11.38	23.38	34.75	46.75	58.13	70.13	81.50	93.50	104.88	116.88	128.25	140.25
NO. OF FILTERS HIGH	HEIGHT INCHES	AIRFLOW CAPACITIES (CFM), AT 500 FPM											
1/2	15.25	-	1,000	-	2,000	-	3,000	-	4,000	-	5,000	-	6,000
1	27.25	1,000	2,000	3,000	4,000	5,000	6,000	7,000	8,000	9,000	10,000	11,000	12,000
1-1/2	39.50	-	3,000	-	6,000	-	9,000	-	12,000	-	15,000	-	18,000
2	51.50	2,000	4,000	6,000	8,000	10,000	12,000	14,000	16,000	18,000	20,000	22,000	24,000
2-1/2	63.75	-	5,000	-	10,000	-	15,000	-	20,000	-	25,000	-	30,000
3	75.75	3,000	6,000	9,000	12,000	15,000	18,000	21,000	24,000	27,000	30,000	33,000	36,000
3-1/2	88.00	-	7,000	-	14,000	-	21,000	-	28,000	-	35,000	-	42,000
4	100.00	4,000	8,000	12,000	16,000	20,000	24,000	28,000	32,000	36,000	40,000	44,000	48,000

TABLE II
GP HOUSING OPTIONS

OPTION	DESCRIPTION
MT13	STANDARD
MT13D	INSULATED DOORS
MT13I	FULLY INSULATED
MT13H	HIGH PRESSURE (+/- 8" W.G.)
MT13HD	HIGH PRESSURE, INSULATED DOORS
MT13HI	HIGH PRESSURE, FULLY INSULATED

GENERAL NOTES:


1. UNIT IS COMPLETELY FACTORY ASSEMBLED. FOR CAPACITY REFER TO TABLE I. FOR APPLICATION REFER TO SALES BULLETIN 24 26 - (LATEST REV.)
2. STANDARD MATERIAL OF CONSTRUCTION: 16 GA. GALVANIZED STEEL HOUSING, EXTRUDED ALUMINUM TRACKS WITH FIN SEAL, NEOPRENE DOOR GASKET AND PHENOLIC KNOBS FOR POSITIVE DOOR SEALING. TWO (2) PRESSURE PORTS INSTALLED UPSTREAM AND DOWNSTREAM.
3. HOUSING OPTIONS:
   (SPECIAL PRICING AND PART NUMBERS REQUIRED)
   A. 16 GA. 304/L, 316/L STAINLESS STEEL OR 0.0625 ALUMINUM HOUSING.
   B. OTHER SPECIAL OPTIONS REQUIRE CAMFIL FARR SALES AND ENGINEERING CONSULTATION.
4. ORDERING INFORMATION: SEE TABLE I AND II
   SPECIFY OPTIONS AND SIZE
   EXAMPLE:

GP MT13 I * 2HX2W


GlidePack Housing — Housing Height X Width

Options
Blank = No Options
I = Fully Insulated
D = Insulated Doors
H = High Pressure
Note: Can be combined
example HI = High Pressure and Insulated


*Material
Blank = Galvanized (standard)
304 = 304/L Stainless Steel
316 = 316/L Stainless Steel

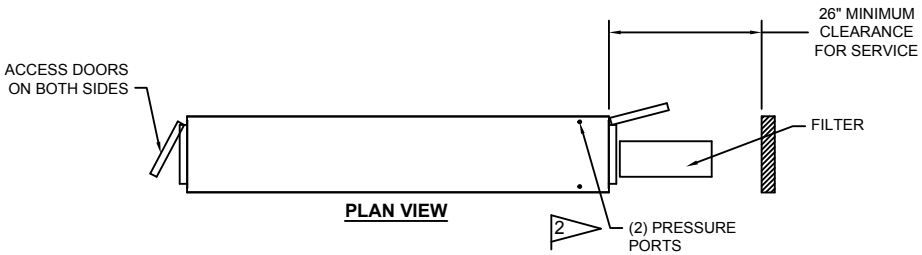

PLAN VIEW

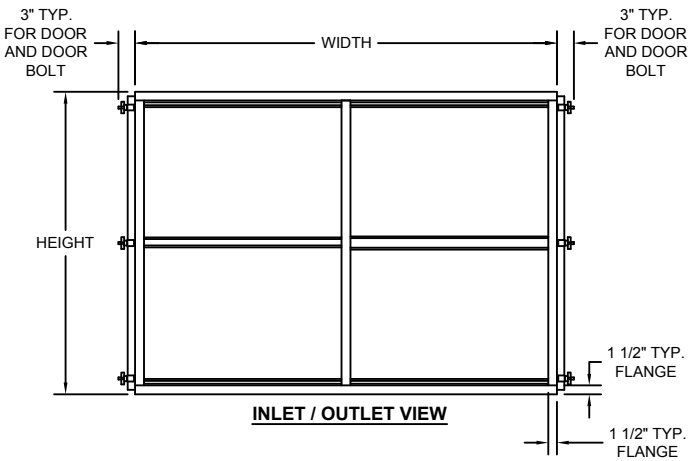

INLET / OUTLET VIEW

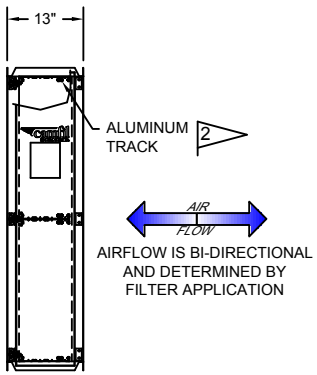


ACCESS VIEW

PERFORMANCE NOTES:

1. STANDARD HOUSING OPERATING PRESSURE TO ±6" W.G. INTEGRITY OF HOUSING TO AMBIENT LEAKAGE IS LESS THAN 0.5% AT 3" W.G. LEAKAGE AROUND FILTER LESS THAN 1% OF RATED FLOW AT 3" W.G. DIFFERENTIAL.
2. OPERATING TEMPERATURE 250° F CONTINUOUS. MEETS NFPA 90A AND TESTED PER ASTM-E84.
3. INSULATION ON INSULATED UNITS IS 1" THICK AND IS RATED AT 0.25 - 0.30 "K" FACTOR.
4. HIGH PRESSURE UNITS OPERATING PRESSURE TO ±8" W.G.

FILTER COMBINATIONS:

MULTIPLE FILTER COMBINATIONS CAN BE INCLUDED INSIDE THE HOUSING USING THE OPTIONS LISTED. TRACK DIVIDERS ARE PROVIDED ON EACH HOUSING TO ALLOW FOR ANY OF THE FOUR OPTIONS LISTED.

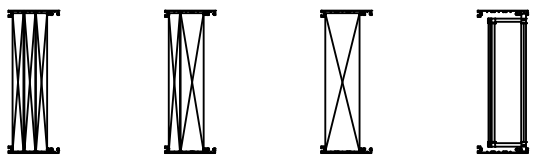

OPTION A: (3) 2" FILTERS

OPTION B: (1) 2" FILTER (1) 4" FILTER

OPTION C: (1) 6" FILTERS

OPTION D: (1) 6" HEADER FILTER

CUSTOMER APPROVAL BLOCK

YOUR APPROVAL OF THIS PRINT AUTHORIZES CAMFIL TO PROCEED WITH MATERIAL PROCUREMENT, TOOLING AND PRODUCT FABRICATION. ANY CHANGES MADE AFTER APPROVAL MAY INCUR FURTHER EXPENSES TO THE CUSTOMER

☐ OK AS IS ☐ OK WITH REVISIONS ☐ SEND REVISED DWG.

SIGNATURE/DATE

camfil

© Camfil http://www.camfil.us

DESCRIPTION
CAMFIL GLIDEPACK MULTITRACK 13 HOUSING
SALES DRAWING

APPROVED BY:	DATE:	DRAWN BY:	DATE:	SHEET	DRAWING NUMBER	REV.
		TLC	7/30/15	1 of 1	M242 MT13	C