



Utility Ball Valve (UBV)

Stainless Steel 2000 WOG (1/4" to 1")/1500 WOG (1 1/4" to 2") 2-PC. Full Bore


Features

- ISO 9001
- The thread ends conform to
ASME B1.20.1 (NPT)
ISO 228/1 (BSP)
ISO 7/1 (BSPT)
- Investment casting
- Anti blow-out stem
- Full bore
- 15% glassfiber fill PTFE reinforced seat
- PTFE seal & packing
- Latch lock handle




Item	Parts	Material
1	Body	ASTM A351-CF8M
2	Cap	ASTM A351-CF8M
3	Ball	ASTM A351-CF8M
4	Stem	ASTM A276-316
5	Gland Nut	AISI 304
6	Ball Seat	*R-PTFE
7	Body Seal	PTFE
8	Packing	PTFE
9	Thrust Washer	PTFE
10	Spring Washer	AISI 304
11	Nut	AISI 304
12	Handle	AISI 304
13	Handle Sleeve	PVC

*R-PTFE=15% Glassfiber filled PTFE

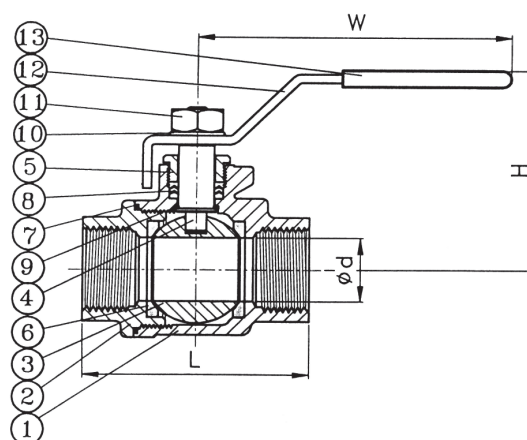

Pressure-Temperature Ratings

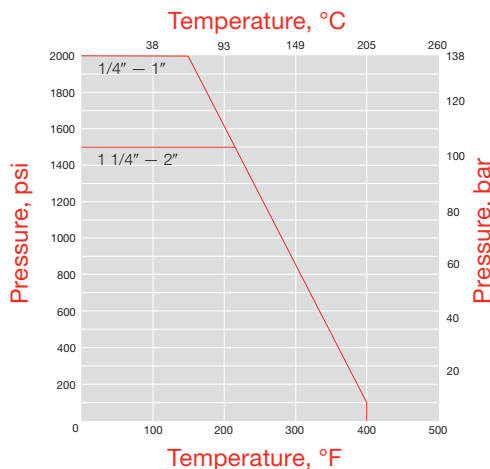

△UBV ball valves are designed to be used in the fully open or fully closed position.

Safe Product Selection

When selecting a product, the total system design must be considered to ensure safe, trouble-free performance. Function, material, compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user.